




GLOBE TRAILER

50-TON FIXED – FIXED NECK /REAR LOAD

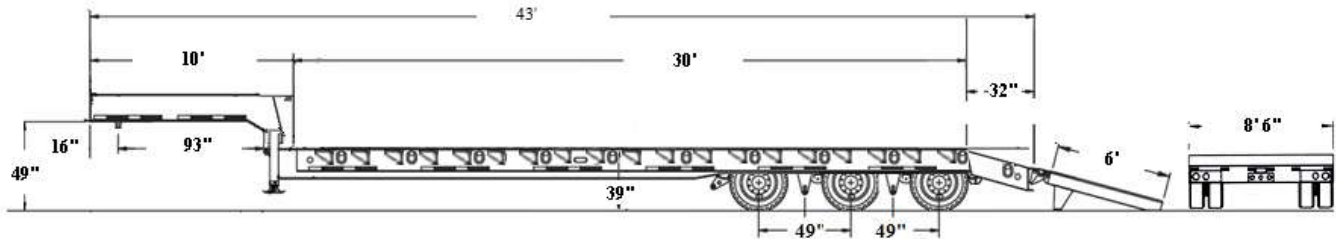

Model : GTBN530-43-30

General: This Specification is for a 50-Ton, Model GTBN503-43-30, 3 Axle, Fixed Neck, Lowboy Trailer with a Maximum Payload of 100,000 lbs and a Shipping Weight of 17,000 lbs +/- 3%.

Dimension: Overall Length: 43'
Overall Width: 8' 6"
(120" w/ outriggers)
Gooseneck: 10'
(93" Swing Clearance)
Load Well Length: 30' 0"
Beavertail: 32"
Ramps: 36" x 72"
Load Well Height: 39"
Fifth Wheel Height: 49"
King Pin Setting: 16"



Frame: Neck:
o Main Beam: 10" I-Beam
Main Deck:
o Main Beam: 16" I beam Mainframe.
o Cross Member: 10" on 12" Centers.
o Side Rails: 10" Channel.

Axles: 3 – 77.5", 25,000 lbs each rated (Tube & Wheel Ends) w/25,000 lbs Hubs & Drums, 30/30 Chambers, 1st Two Axles ABS, 3rd Axle Non-ABS.

King Pin: 2 Inch Heavy Duty, AAR Rated.

Wheels & Tires:
o Tires: 12 ea 255/70R X 22.5 "H" Load Range, Steel Belted Radials.
o Wheels: 12 ea. 8.25 X 22.5, 10 Hole Hub Piloted Steel Disc Wheels.

Brakes: 16.5 X 7 Full Air Brakes, 30/30 Chambers, Spring Parking Brakes, & Automatic Slack Adjusters.

Suspension: 25,000 lbs leaf Spring Suspension Tri-Axle,

Rear Tail Section: Covered Diamond Plate w/ Grousers.

Electrical: 12-Volt Electrical System with Standard 7 Way SAE Connector, All Lighting LED and Sealed in Rubber, Grommet Mountings to DOT Specifications.

Loading Ramps: Electric/Hydraulic, Self Contained – 36" x 72", with Separate Charge Plug to Charge Battery Off Truck Power Supply (Includes Truck Kit).

Decking: ¼" Diamond Plate & Oak Flooring w/ Support Bracing Underneath, Center Deck Floored.

Outriggers: 15 ea Side Cast Steel Outriggers Double at Beavertail Transition, Double in Middle of Deck.

Tie Downs: 14 "D" Ring Tie Downs 7 each Side.

Finish: Sandblasted to Near White Primed and Top Coated Standard Color of Choice



Globe Distributor – Pioneer Equipment
8515 Baymeadows Way, Suite 102
Jacksonville, FL 32256 USA

Phone: +1.904.732.2151
Email: sales@pioneerjax.com
Site: www.pioneerjax.com